


AHXAMK-WM 12/20 (24) kV 3-core

Medium voltage cable

12/20 (24) kV

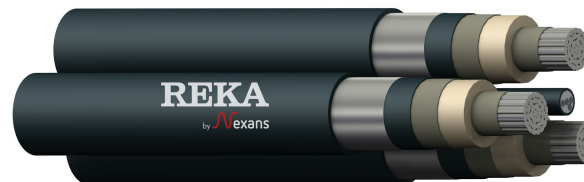

Application

Medium-voltage cable for fixed installations outdoors. May be buried directly in soil, also by ploughing. Cable is longitudinally and radially watertight and therefore it is suitable where wet soil and / or fresh water permanently occurs. Installations must be in accordance with national regulations and rules of installations. The cable is halogen-free, but without fire protection. The cable is not CPR-classified.

Design

| | |
|----------------------------|---|
| Standards | HD 620 10 F, SFS 5636 |
| Conductor | Watertight, circular, stranded aluminium, EN/IEC 60228 class 2 |
| Conductor screen | Semiconducting cross-linked polyethylene XLPE |
| Insulation | Cross-linked polyethylene XLPE |
| Insulation screen | Semiconducting cross-linked polyethylene XLPE |
| Core Identification | White phase numbering: L1, L2, L3 |
| Cable lay up | Three sheathed cores are laid up around a polyethylene insulated galvanized steel messenger |
| Inner covering | Semiconducting waterswellable tape against longitudinal water penetration |

Temperature limits

| | |
|---|-----|
| Max. conductor temperature °C | 90 |
| Max. cond. temp. short circuit max. 5 s °C | 250 |
| Min. cable temperature during operation °C | -50 |
| Min. cable temperature during handling °C | -20 |
| Min. cable temperature during transport °C | -40 |

| | |
|------------------------------------|--|
| Metal screen | Polyethylene laminated aluminium foil, which acts also as a radial water barrier |
| Oversheath | UV-protected PE-plastic PELLD , Black |
| Longitudinal watertightness | Semiconducting water swellable tape |

| Technical information | 3x50+62 | 3x70+62 | 3x95+62 | 3x120+62 | 3x150+62 | 3x185+62 | 3x240+62 |
|---|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Product code | 1187142 | 1187143 | 1187144 | 1187145 | 1187146 | 1187147 | 1187148 |
| Nominal diameter of a sheathed phase conductor mm | 25 | 27 | 29 | 30 | 32 | 33 | 36 |
| Nominal cable diameter mm | 65 | 69 | 72 | 75 | 78 | 80 | 86 |
| Nominal cable weight kg/km | 2257 | 2552 | 2882 | 3254 | 3568 | 4100 | 4815 |
| Nominal weight of Aluminium kg/km | 927 | 1089 | 1278 | 1495 | 1690 | 2024 | 2444 |
| Nominal diameter of conductor mm | 8,0 | 9,5 | 11,1 | 12,6 | 13,9 | 15,6 | 17,8 |
| Nominal thickness of conductor screen mm | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 |
| Nominal Insulation thickness mm | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 |
| Nominal diameter over the insulation without insulation screen mm | 19,3 | 20,7 | 22,4 | 23,8 | 25,3 | 26,8 | 29,2 |
| Nominal thickness of insulation screen mm | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 | 0,5 |
| Nominal diameter of messenger mm | 13,1 | 13,1 | 13,1 | 13,1 | 13,1 | 13,1 | 13,1 |
| Nominal thickness of PE-laminated aluminium foil mm | 0,2 | 0,2 | 0,2 | 0,2 | 0,2 | 0,2 | 0,3 |
| Nominal thickness of oversheath mm | 1,8 | 1,9 | 1,9 | 2,0 | 2,0 | 2,1 | 2,2 |
| Maximum forces during installation when pulling by | | | | | | | |
| Max. pulling force by pulling-eye kN | 7,5 | 10,5 | 14,3 | 18,0 | 20,0 | 20,0 | 20,0 |
| Max. pulling force by pulling-stocking kN | 2,3 | 3,2 | 4,3 | 5,4 | 6,8 | 8,3 | 8,5 |
| Minimum bending radii | | | | | | | |
| Minimum bending radius, handling mm | 784 | 822 | 863 | 901 | 937 | 957 | 1027 |
| Minimum bending radius, final bending mm | 549 | 575 | 604 | 631 | 656 | 670 | 719 |
| Minimum bending radii | | | | | | | |
| During handling and installation, phase conductor cm | 38 | 41 | 44 | 45 | 48 | 50 | 54 |
| During handling and installation, cable cm | 78 | 82 | 86 | 90 | 94 | 96 | 103 |
| In final installation, phase conductor cm | 26 | 28 | 30 | 32 | 34 | 35 | 38 |
| In final installation, cable cm | 55 | 58 | 60 | 63 | 66 | 67 | 72 |
| Minimum bending radii | | | | | | | |
| During handling and installation, phase conductor m | 0,38 | 0,41 | 0,44 | 0,45 | 0,48 | 0,50 | 0,54 |
| During handling and installation, cable m | 0,78 | 0,82 | 0,86 | 0,90 | 0,94 | 0,96 | 1,03 |
| In final installation, phase conductor m | 0,26 | 0,28 | 0,30 | 0,32 | 0,34 | 0,35 | 0,38 |
| In final installation, cable m | 0,55 | 0,57 | 0,60 | 0,63 | 0,66 | 0,67 | 0,72 |
| DC resistance | | | | | | | |
| Max. DC resistance of conductor at 20 °C Ω/km | 0,641 | 0,443 | 0,320 | 0,253 | 0,206 | 0,164 | 0,125 |
| Nominal DC resistance of PE-laminated aluminium foil 20 °C Ω/km | 2,0 | 1,9 | 1,8 | 1,7 | 1,6 | 1,5 | 0,9 |

| Technical information | 3x50+62 | 3x70+62 | 3x95+62 | 3x120+62 | 3x150+62 | 3x185+62 | 3x240+62 |
|--|---------|---------|---------|----------|----------|----------|----------|
| AC resistance of phase conductor, screen circuit closed | | | | | | | |
| Conductor temperature 40 °C Ω/km | 0,6927 | 0,4788 | 0,3460 | 0,2736 | 0,2229 | 0,1776 | 0,1356 |
| Conductor temperature 65 °C Ω/km | 0,7573 | 0,5234 | 0,3782 | 0,2991 | 0,2436 | 0,1941 | 0,1482 |
| Conductor temperature 70 °C Ω/km | 0,7702 | 0,5324 | 0,3846 | 0,3042 | 0,2478 | 0,1974 | 0,1507 |
| Conductor temperature 90 °C Ω/km | 0,8219 | 0,5681 | 0,4104 | 0,3246 | 0,2644 | 0,2106 | 0,1607 |
| Inductance per phase | | | | | | | |
| In flat formation, free space between cables equal to one cable diameter mH/km | 0,60 | 0,58 | 0,56 | 0,54 | 0,54 | 0,52 | 0,51 |
| In trefoil formation, cables touching each other mH/km | 0,41 | 0,39 | 0,38 | 0,36 | 0,35 | 0,33 | 0,32 |
| Electrical values | | | | | | | |
| Calculated operation capacitance μF/km | 0,17 | 0,18 | 0,20 | 0,22 | 0,24 | 0,26 | 0,29 |
| Calculated charging current with main voltage A/km | 0,6 | 0,7 | 0,7 | 0,8 | 0,9 | 0,9 | 1,1 |
| Calculated earth fault current with main voltage A/km | 1,8 | 2,0 | 2,2 | 2,4 | 2,6 | 2,8 | 3,2 |
| Current ratings | | | | | | | |
| Cables in air (25 °C) | | | | | | | |
| Flat, conductor 90 °C, open screen A | 210 | 265 | 320 | 370 | 425 | 485 | 570 |
| Flat, conductor 90 °C, closed screen A | 205 | 255 | 310 | 350 | 395 | 440 | 515 |
| Trefoil, conductor 90 °C, open screen A | 195 | 235 | 285 | 330 | 380 | 430 | 505 |
| Trefoil, conductor 90 °C, closed screen A | 195 | 235 | 280 | 325 | 370 | 425 | 490 |
| Cables in the ground (15 °C and 1,0 K.m/W), Installation depth 0,7 m | | | | | | | |
| Trefoil, conductor 65 °C, open screen A | 155 | 205 | 240 | 270 | 305 | 345 | 395 |
| Trefoil, conductor 65 °C, closed screen A | 155 | 200 | 235 | 265 | 300 | 330 | 385 |
| Trefoil, conductor 90 °C, open screen A | 185 | 240 | 280 | 320 | 360 | 405 | 465 |
| Trefoil, conductor 90 °C, closed screen A | 185 | 235 | 275 | 310 | 355 | 390 | 455 |
| Maximum thermal short circuit current during 1 s | | | | | | | |
| Phase (initial 90 °C, final 250 °C) kA | 4,7 | 6,6 | 8,9 | 11,3 | 14,1 | 17,4 | 22,6 |
| Metal screen (initial 35 °C, final 250 °C) kA | 2,9 | 3,0 | 3,2 | 3,4 | 3,6 | 3,8 | 5,3 |
| Metal screen (initial 60 °C, final 250 °C) kA | 2,7 | 2,8 | 2,9 | 3,1 | 3,3 | 3,5 | 4,9 |
| Metal screen (initial 85 °C, final 250 °C) kA | 2,4 | 2,5 | 2,7 | 2,9 | 3,0 | 3,2 | 4,4 |

2026-06-22 11:53:19

| STANDARD PACKAGES | 3x50+62 | 3x70+62 | 3x95+62 | 3x120+62 | 3x150+62 | 3x185+62 | 3x240+62 |
|-------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Product code | 1187142 | 1187143 | 1187144 | 1187145 | 1187146 | 1187147 | 1187148 |
| GTIN code | 6410006022441 | 6410006022458 | 6410006022465 | 6410006022472 | 6410006022489 | 6410006022694 | 6438176300107 |
| Package | 500 K26 | 500 K26 | 500 K26 | 500 K26 | 500 K28 | 500 K28 | 500 K28 |