


## AXMK Power cable

### 4x25 S

Cables may be used for fixed installations, indoors and outdoors. Direct burial in soil is allowed, as long as the relevant national rules of installations are followed. Can be used in direct sunlight. Self-extinguishing, no after-burning.

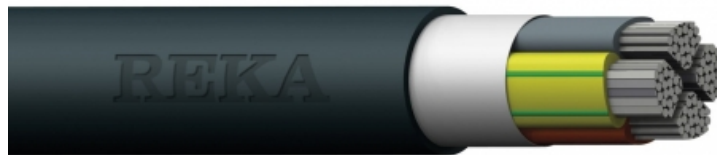

<b>Fire class</b>	Eca
<b>CPR - DoP</b>	<a href="#">2017030_DOP.pdf</a> <a href="#">2017011_DOP.pdf</a> <a href="#">2017037_DOP.pdf</a>
<b>Conductor</b>	16 ... 25 mm <sup>2</sup> circular stranded aluminium, IEC 60228 class 2 35 ... 300 mm <sup>2</sup> sector shaped, stranded aluminium, IEC 60228 class 2
<b>Insulation</b>	UV-resistant XLPE-compound
<b>Identification</b>	Green/yellow, brown, black, grey
<b>Filling material</b>	Plastic tapes
<b>Outer sheath</b>	Black UV-resistant PVC

Size: 4x25 S  
Reka code: 06 262 08--en  
Packing (m): 500 K10

**Voltage**

0,6/1 (1.2) kV

<b>Diameter (mm)</b>	22
<b>Weight&amp;nbsp;</b>	520
<b>Minimum allowed bending radius in installation (cm)</b>	24
<b>Minimum allowed bending radius in final installation (cm)</b>	16
<b>Maximum allowed pulling force when pulling from conductors (kN)</b>	1,5
<b>Maximum allowed pulling force when pulling with cable stocking (kN)</b>	1,5
<b>Maximum DC resistance of phase conductor, +20°C (ohm/km)</b>	1,2
<b>Minimum handling temperature (°C)</b>	-20
<b>Maximum conductor temperature (°C)</b>	90
<b>Conductor short-circuit temperature, 5 s (°C)</b>	250
<b>Product number</b>	06 262 08
<b>GTIN code</b>	



Saved from [www.rekacables.com](http://www.rekacables.com) website 17.11.2018. Please note that product details can change.