


AXMK Power cable 4x35 S

Cables may be used for fixed installations, indoors and outdoors. Direct burial in soil is allowed, as long as the relevant national rules of installations are followed. Can be used in direct sunlight. Self-extinguishing, no after-burning.

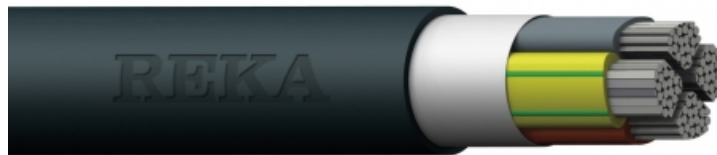

Fire class	Eca
CPR - DoP	2017030_DOP.pdf 2017011_DOP.pdf 2017037_DOP.pdf
Conductor	16 ... 25 mm ² circular stranded aluminium, IEC 60228 class 2 35 ... 300 mm ² sector shaped, stranded aluminium, IEC 60228 class 2
Insulation	UV-resistant XLPE-compound
Identification	Green/yellow, brown, black, grey
Filling material	Plastic tapes
Outer sheath	Black UV-resistant PVC

Size: 4x35 S
Reka code: 06 262 09--en
Packing (m): 500 K11

Voltage

0,6/1 (1.2) kV

Diameter (mm)	24
Weight&nbsp;	650
Minimum allowed bending radius in installation (cm)	26
Minimum allowed bending radius in final installation (cm)	18
Maximum allowed pulling force when pulling from conductors (kN)	2,1
Maximum allowed pulling force when pulling with cable stocking (kN)	2,1
Maximum DC resistance of phase conductor, +20°C (ohm/km)	868
Minimum handling temperature (°C)	-20
Maximum conductor temperature (°C)	90
Conductor short-circuit temperature, 5 s (°C)	250
Product number	06 262 09
GTIN code	

